



# ODOR-FREE HOLDING TANK SYSTEMS

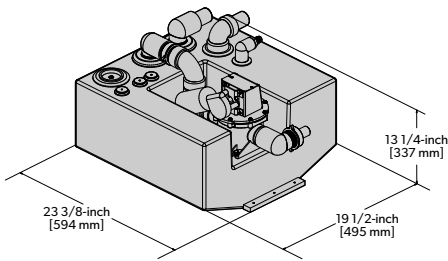


**10 HTS-T**  
**HEIGHT:** 13.25 IN./635 MM  
**WIDTH:** 19.5 IN./495 MM  
**LENGTH:** 23.375 IN./594 MM

**ITEM:** 322721012 – 12V  
**ITEM:** 322721024 – 24V

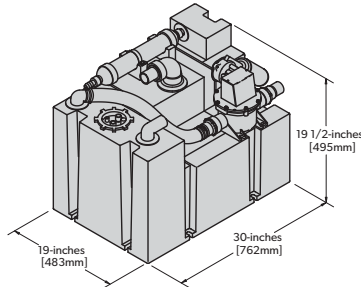

**28 HTS-T**  
**HEIGHT:** 19.5 IN./495 MM  
**WIDTH:** 19 IN./483 MM  
**LENGTH:** 30 IN./762 MM

**ITEM:** 322012812 – 12V  
**ITEM:** 322012824 – 24V

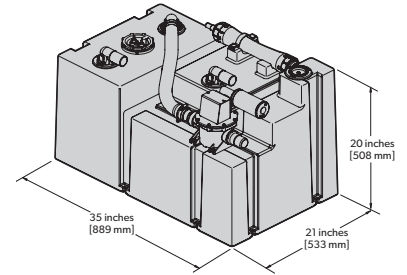

**40 HTS-T**  
**HEIGHT:** 20 IN./508 MM  
**WIDTH:** 21 IN./533 MM  
**LENGTH:** 35 IN./889 MM

**ITEM:** 322014012 – 12V  
**ITEM:** 322014024 – 24V

Model	10 HTS-T	28 HTS-T	40 HTS-T
<b>Capacity</b> (gal./liters)	10/38	28/106	40/151
<b>Weight</b>			
<b>Empty</b> (lbs./kg)	18/8.2	40/18	44/20
<b>Max</b> (lbs./kg)	98/40.9	260/118	364/165
<b>Outlets</b> (qty)	2	2	2
<b>Vent filter</b>	-	Included	
<b>HTS-T SERIES SYSTEM REQUIREMENTS</b>			
<b>Electrical</b>			
Discharge pump* Power draw (avg.)	6 amps/12 V DC   3 amps/24 V DC		
Discharge pump* Circuit breaker/fuse	10 amps/12 V DC   5 amps/24 V DC		
DTM04 Tank Monitor Power draw (avg.)	0.15 amp/12 V DC   0.09 amp/24 V DC		
DTM04 Tank Monitor Circuit breaker/fuse	1 amp/12 V DC   1 amp/24 V DC		
<b>Inlet Plumbing</b>			
ID	1.5 in./38 mm sanitation hose or PVC pipe		
<b>Discharge plumbing</b>			
ID	1.5 in./38 mm sanitation hose or PVC pipe		
Horizontal run	30 ft./9.1 m max. to discharge fitting		
Vertical run	6 ft./1.8 m max. to discharge fitting		
<b>Vent Hose</b>			
ID	5/8 in./16 mm sanitation hose		